




Seam testing station

to check the watertightness of seam-sealed/welded seams (similar to DIN EN ISO 811)


- Quick opening and closing of the testing plate
- Connection to pressure hose or with hand pump
- Guidance value can be initialized with the pneumatic versions
- Water tank with level indicator
- Water-drain-connector for leakage water
- Safety valve (1bar) with the pneumatic versions
- Inlay to prevent pushing-through while testing

100% proof?!

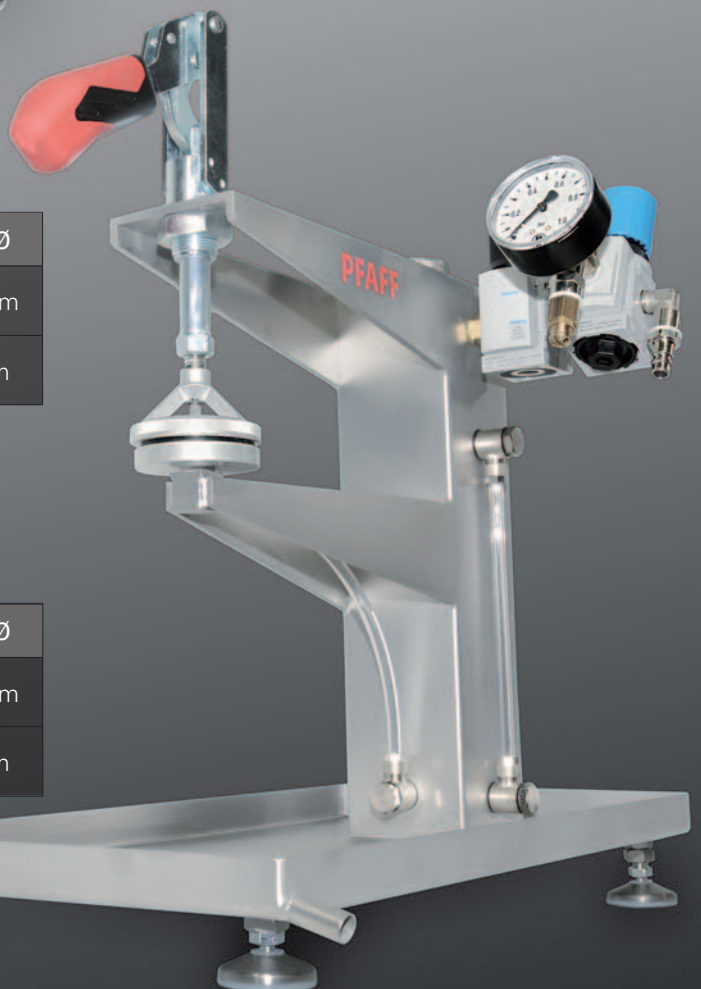

Version	Application	Model no.	Plate Ø
with a big testing plate and hand pump	clothing	95-257 514-94/001	113 mm
with a small testing plate and hand pump	shoes	95-257 514-94/002	50 mm

Version	Application	Model no.	Plate Ø
with a big testing plate, pneumatic	clothing	95-257 514-94/003	113 mm
with a small testing plate, pneumatic	shoes	95-257 514-94/004	50 mm

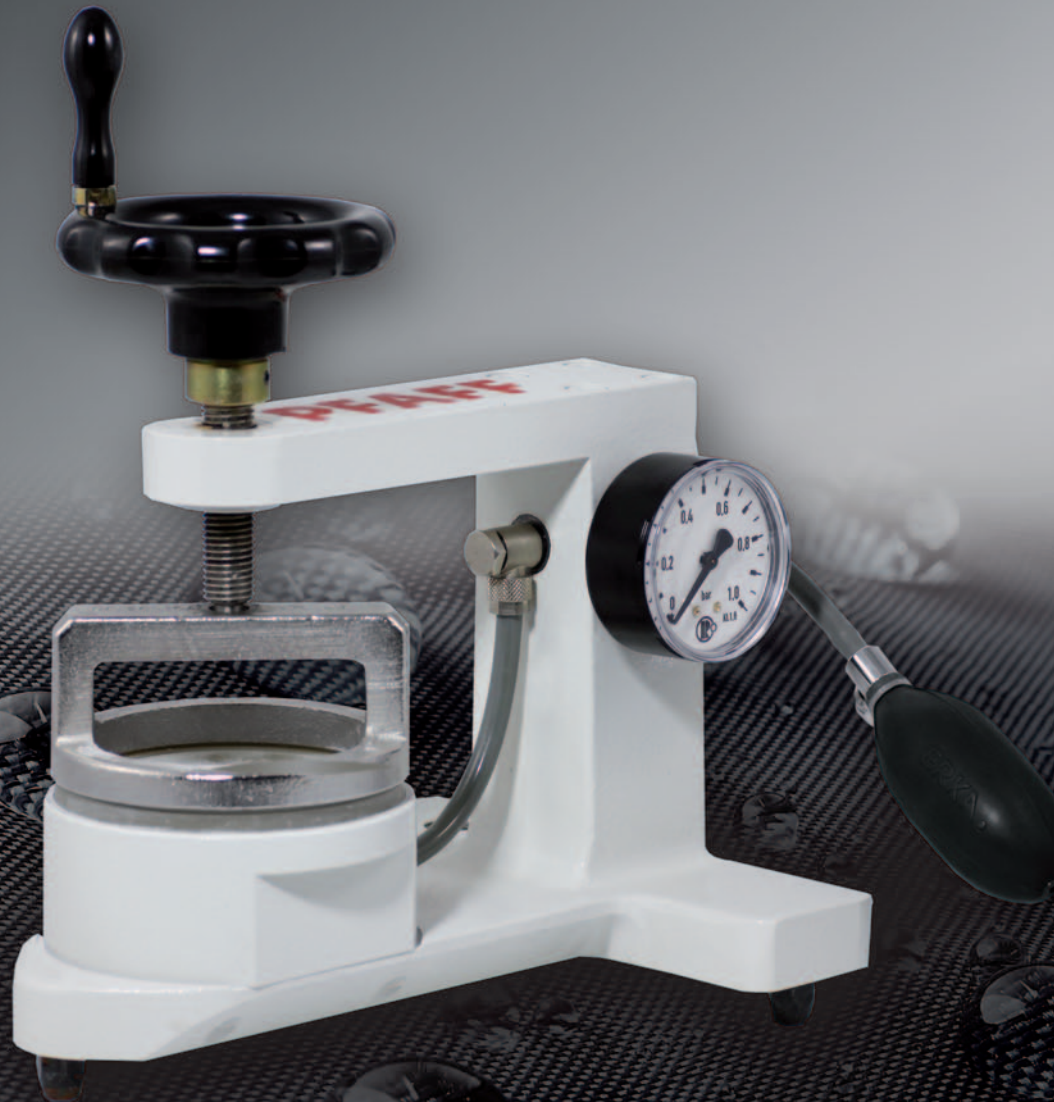

economic
and **portable**

Version	Application	Model no.	Plate Ø
Portable device with a big testing plate and hand pump	for sporadic testing of the watertightness	95-203 099-71/895	90 mm